




Feature :

Suitable for programming applications
Very compact socket $\varnothing 2.55$ mm [0.10"]

Application :


Hearing aid
Hand-held device



SPECIFICATIONS



CONNECTION FORCE	4 PINS : 300 gf MIN. ; 5 PINS : 350 gf MIN.
DISCONNECTION FORCE	4 PINS : 600 gf MAX. ; 5 PINS : 650 gf MAX.
CONTINUOUS CURRENT	150 mA MAX.
CONTACT RESISTANCE	100 m Ω MAX. 1.5 V DC ; 100 mA , by Method of Voltage DROP
INSULATION RESISTANCE	1 M Ω MIN. 100 V DC
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 110 V AC for 1 Minute
TEMPERATURE RANGE	STORAGE TEMP.: -40°C ~ 85°C ; OPERATING TEMP.: -20°C ~ 70°C
OPERATING LIFE	10,000 cycles MIN.

► HOW TO ORDER


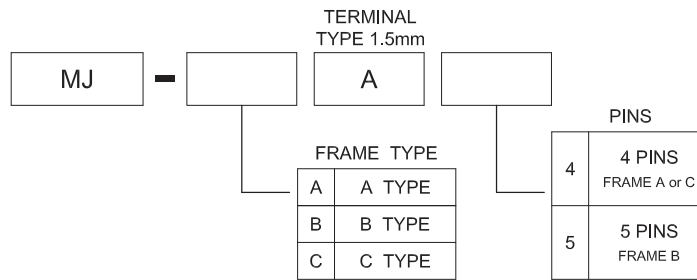


► DIMENSION



MJ-AA4

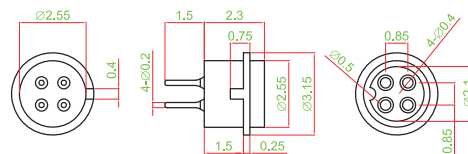

MJ-BA5

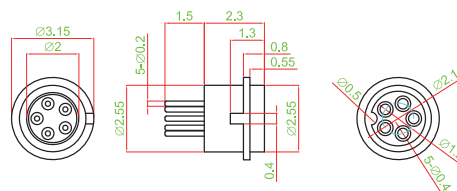

MJ-CA4

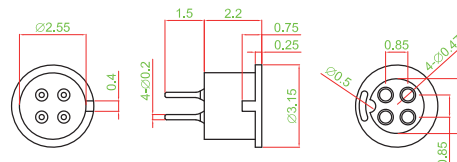

- TACT SWITCH
- PUSH BUTTON SWITCH
- LED TOUCH SENSOR SWITCH
- 5 DIRECTION NAVIGATION SWITCH WITH LED
- MEMBRANE SWITCH
- LED LIGHT BAR
- SLIDE SWITCH
- ROTARY SWITCH
- ROCKER SWITCH
- DETECT SWITCH
- ENCODER
- INTERRUPTER
- MINIATURE MICRO SWITCH
- TELEPHONE HOOK SWITCH
- DOOR SWITCH
- MINI SIZE SOCKET
- KNOB
- CAP SYMBOL